



TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL1 (Beige)	4'6" (1.37m)	3'6" (1.06m)	32'9" (10m)	5680-99-835-7866
MIL1 (Green)	4'6" (1.37m)	3'6" (1.06m)	32'9" (10m)	5680-99-001-9396

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

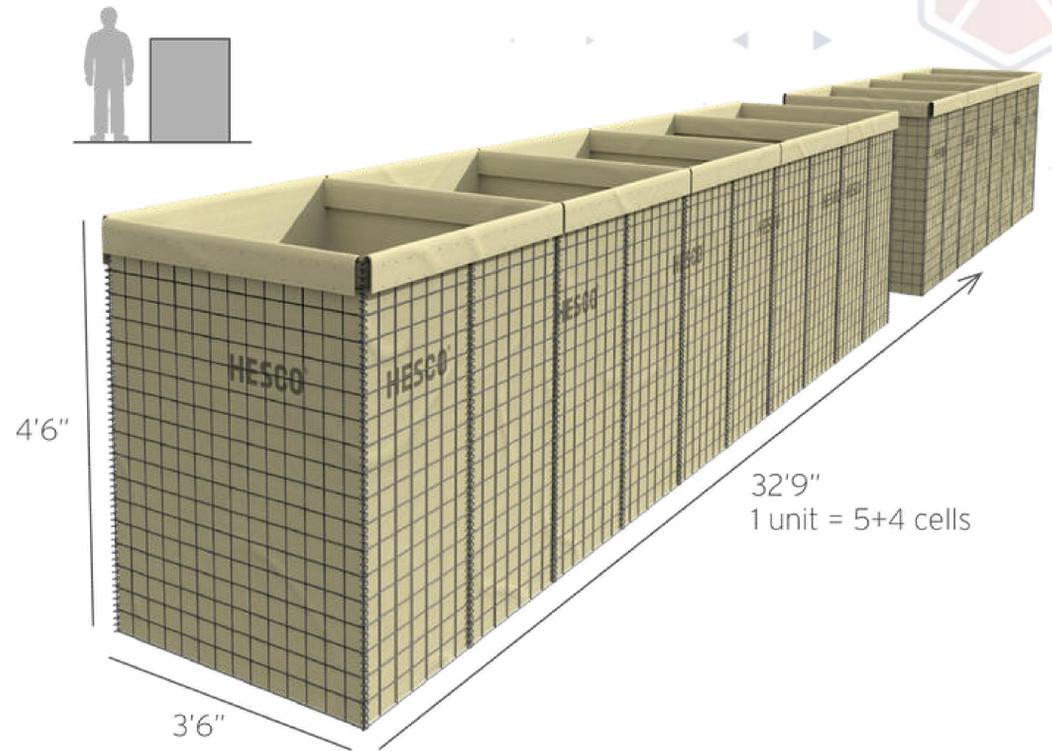

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
10" (0.25m)	3'10" (1.17m)	4'6" (1.37m)	333 lb. (151kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
7 units	7'3" (2.20m)	3'11" (1.20m)	4'9" (1.45m)	2,381 lb. (1,080kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	126	4,133' (1,260m)
20' Container	8	56	1,837' (560m)
40' Container	16	112	3,674' (1,120m)

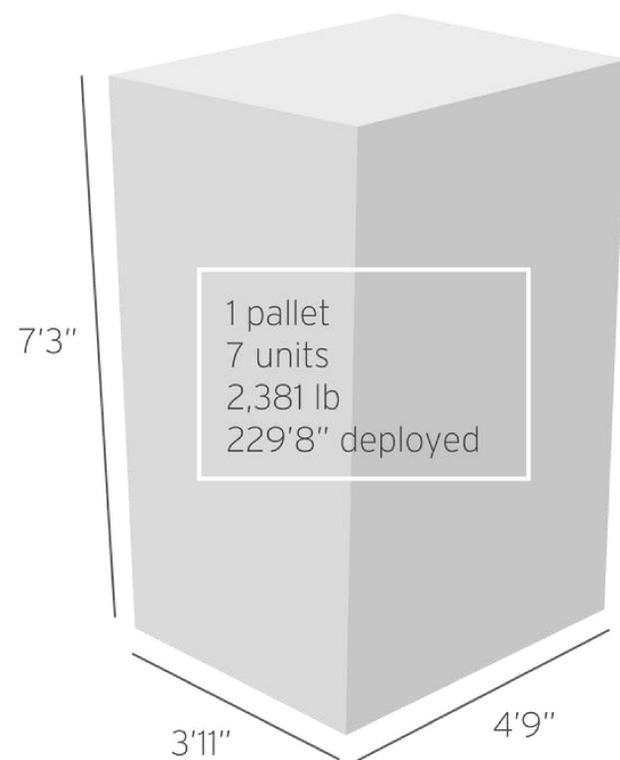

+966 11 474 8635

www.hitech.sa
sales@hitech.sa

Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL2 (Beige)	2' (0.61m)	2' (0.61m)	4' (1.22m)	5680-99-968-1764
MIL2 (Green)	2' (0.61m)	2' (0.61m)	4' (1.22m)	5680-99-001-9397

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.



PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
2' (0.05m)	2'3" (0.68m)	2' (0.61m)	22 lb. (10kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
120 units	3'1" (0.95m)	6'7" (2.0m)	6'11" (2.10m)	2,804 lb. (1,272kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	2/160	8,645' (2,635m)
20' Container	6	720	2,881' (878m)
40' Container	12	1,440	5,763' (1,756m)



+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL3 (Beige)	3'3" (1.00m)	3'3" (1.00m)	32'9" (10m)	5680-99-001-9392
MIL3 (Green)	3'3" (1.00m)	3'3" (1.00m)	32'9" (10m)	5680-99-001-9398

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

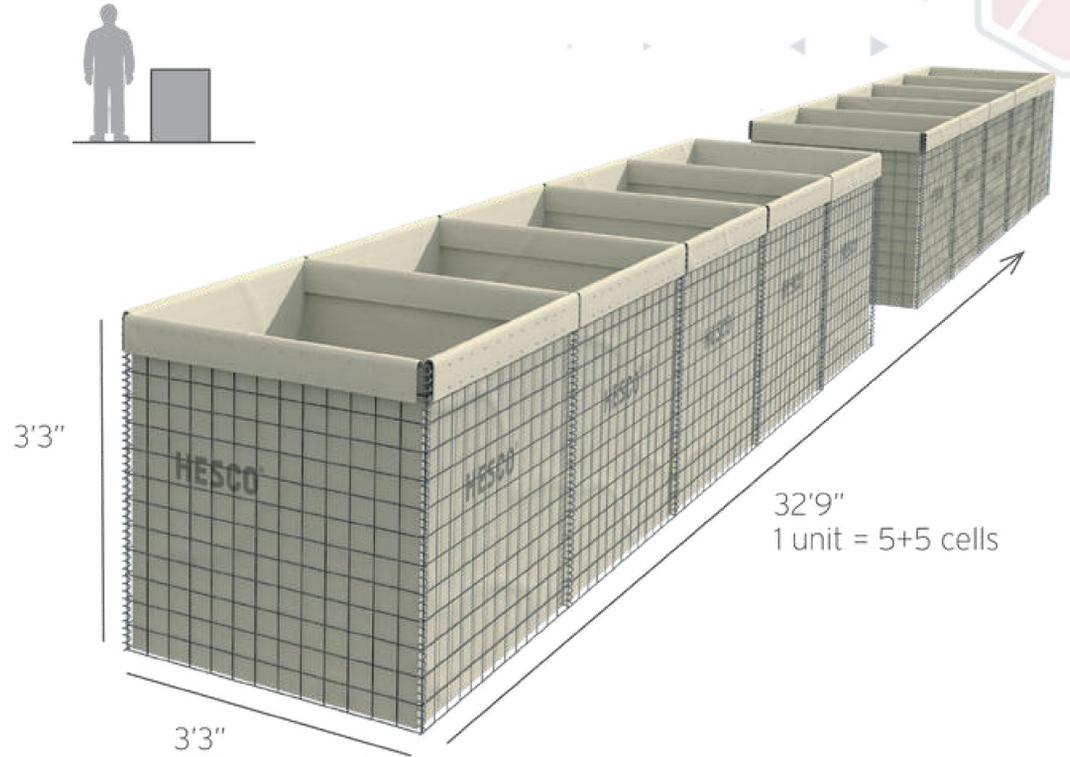

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
9" (0.23m)	3'9" (1.14m)	3'3" (1.00m)	240 lb. (109kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
8 units	5'10" (1.78m)	3'7" (1.10m)	3'11" (1.20m)	1,956 lb. (887kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	22	176	5,774' (1,760m)
20' Container	10	80	2,624' (800m)
40' Container	20	160	5,249' (1,600m)

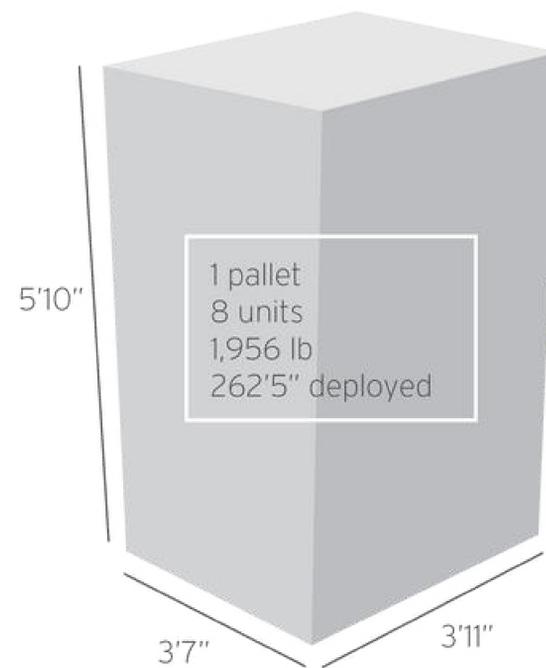

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL4 (Beige)	3'3" (1.00m)	5" (1.52m)	32'9" (10m)	5680-99-001-9393
MIL4 (Green)	3'3" (1.00m)	5" (1.52m)	32'9" (10m)	5680-99-001-9399

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

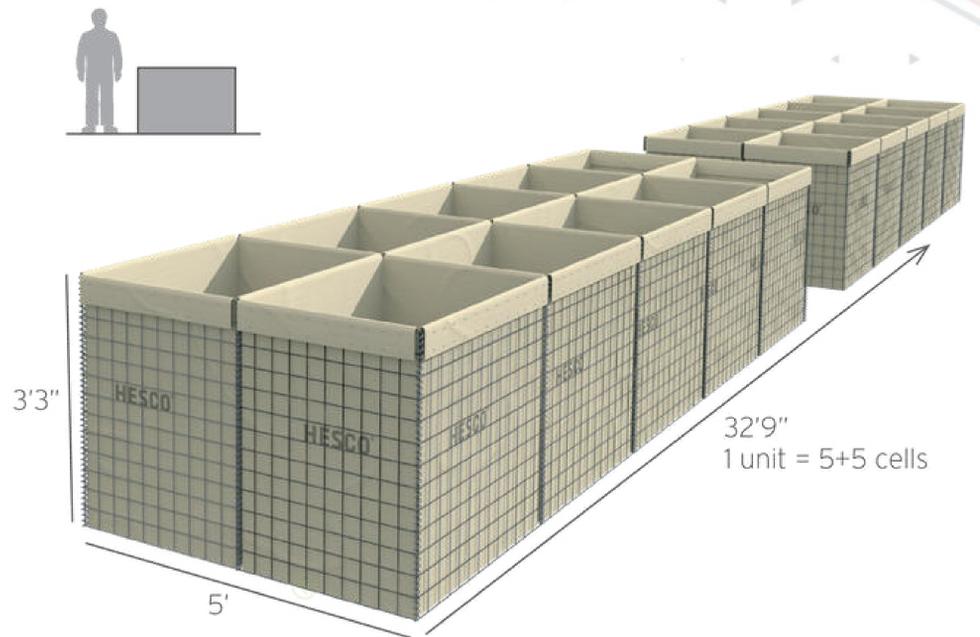

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
1'4" (0.40m)	5'3" (1.60m)	3'3" (1.00m)	370 lb. (168kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
8 units	6'1" (1.85m)	3'7" (1.10m)	8'9" (2.67m)	3,020 lb. (1,370kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	10	80	2,624' (800m)
20' Container	4	32	1,050' (320m)
40' Container	8	64	2,100' (640m)

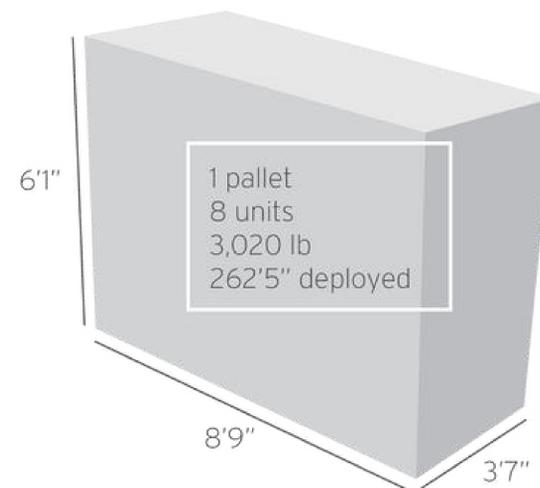

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL5 (Beige)	2" (0.61m)	2" (0.61m)	10' (3.05m)	5680-99-001-9394
MIL5 (Green)	2" (0.61m)	2" (0.61m)	10' (3.05m)	5680-99-001-9400

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

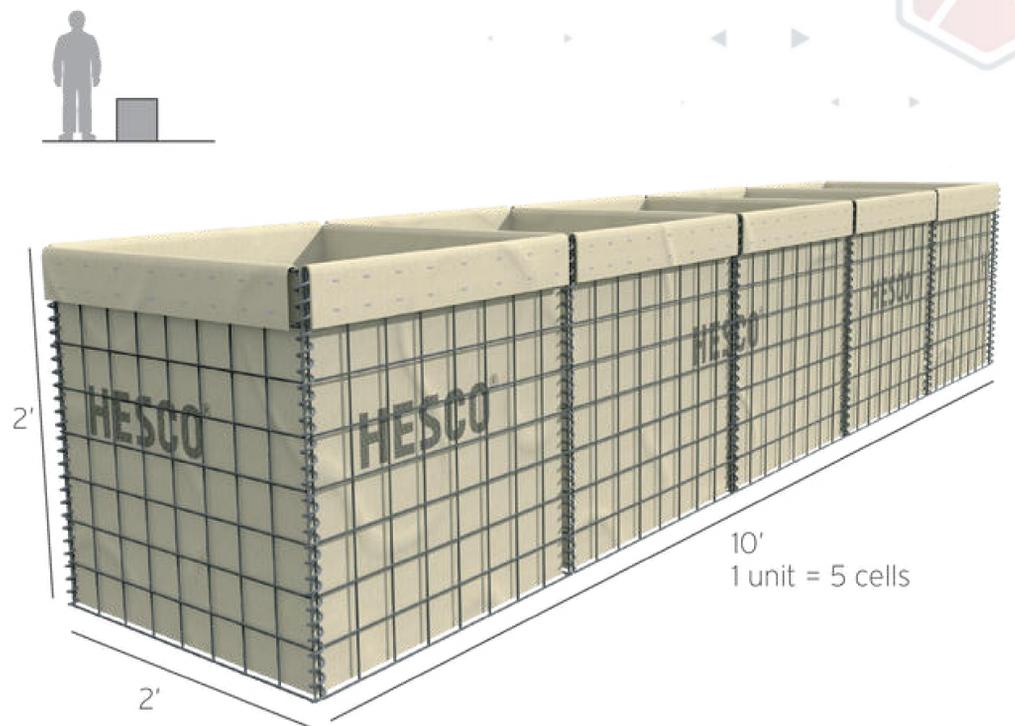

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
5" (0.13m)	2'7" (0.79m)	6'5" (1.95m)	51 lb. (23kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
50	2'10" (0.87m)	6'5" (1.95m)	6'11" (2.10m)	2,626 lb. (1,191kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	900	9,006' (2,745m)
20' Container	6	300	3,000' (915m)
40' Container	12	600	6,003' (1,803m)

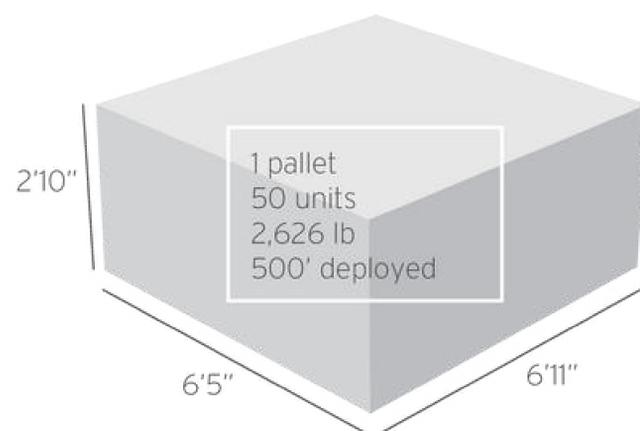

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL7 (Beige)	7'3" (2.21m)	7" (2.13m)	91' (27.74m)	5680-99-169-0183
MIL7 (Green)	7'3" (2.21m)	7" (2.13m)	91' (27.74m)	5680-99-126-3716

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

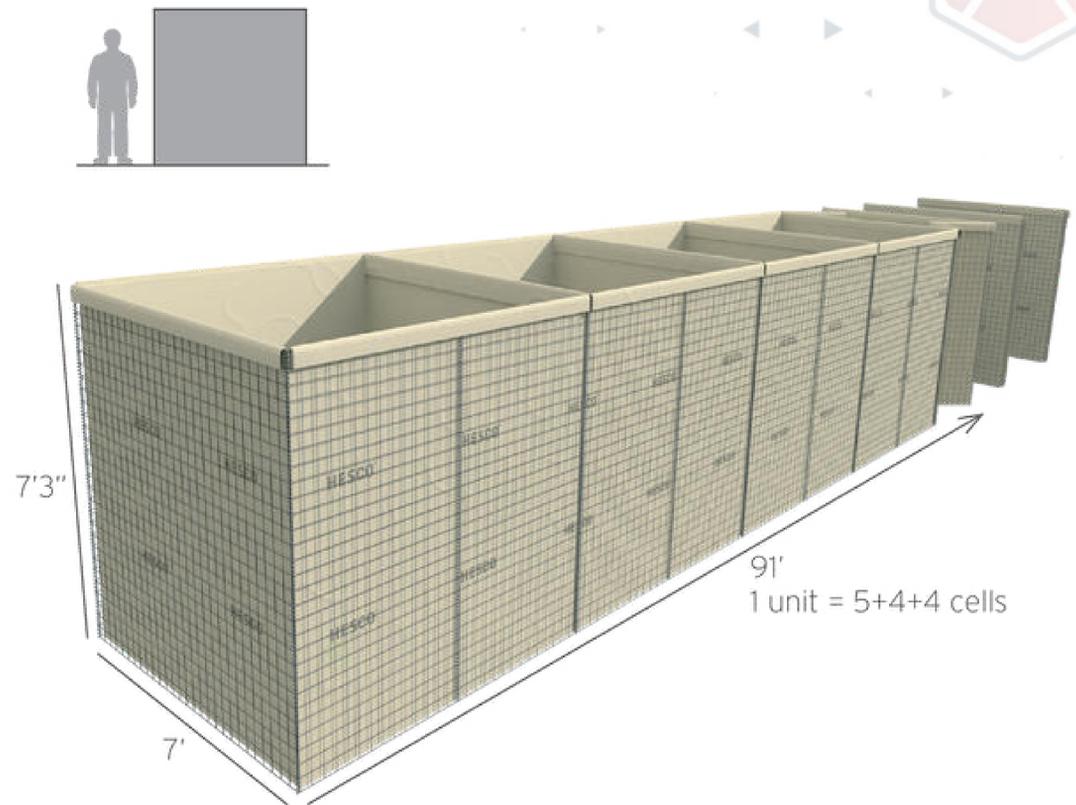

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
1'7" (0.48m)	7'4" (2.24m)	7'3" (2.21m)	2,105 lb. (955kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1	1'11" (0.60m)	7'2" (2.20m)	7'6" (2.300m)	2,277 lb. (1,033kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	20	20	1,820' (555m)
20' Container	6	6	546' (166m)
40' Container	15	15	1,365' (416m)
40' HC Container	20	20	1,820' (555m)

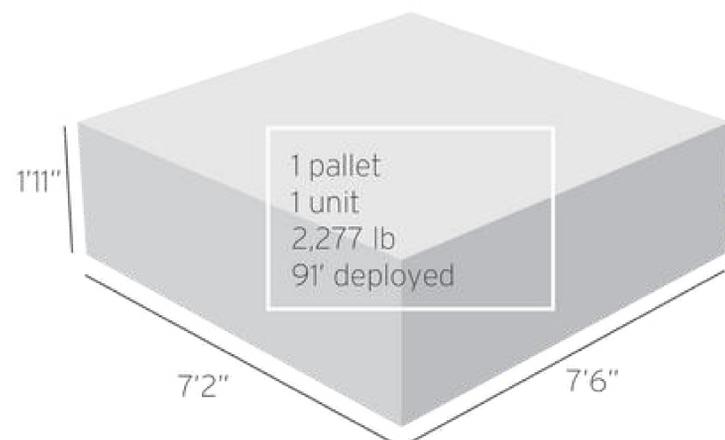

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL8 (Beige)	4'6" (1.37m)	4" (1.22m)	32'9" (10m)	5680-99-335-4902
MIL8 (Green)	4'6" (1.37m)	4" (1.22m)	32'9" (10m)	5680-99-517-3281

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

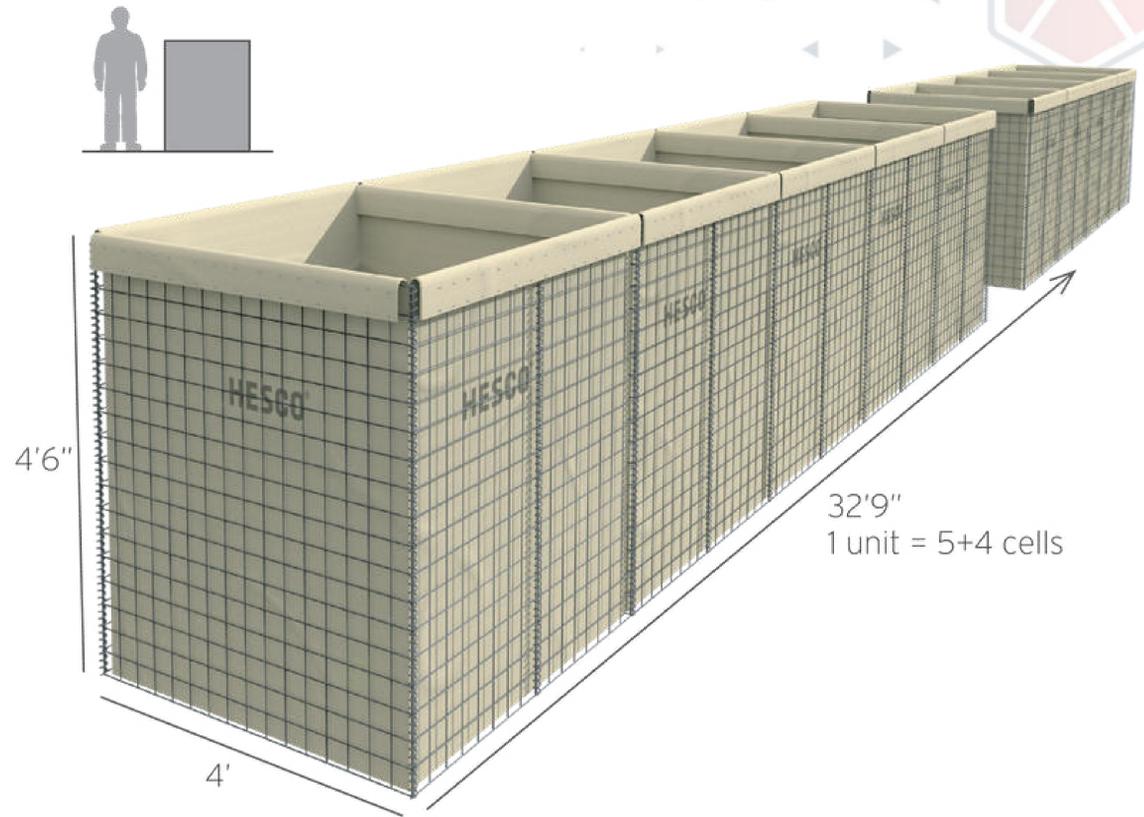

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
11" (0.28m)	4'3" (1.29m)	4'6" (1.37m)	337 lb. (153kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
4	5'1" (1.55m)	3'10" (1.17m)	4'6" (1.37m)	1,419 lb. (644kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	72	2,362' (720m)
20' Container	8	32	1,050' (320m)
40' Container	18	72	2,362' (720m)

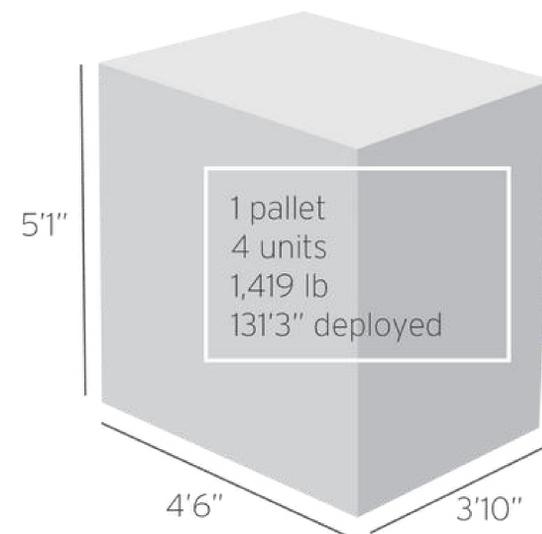

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL9 (Beige)	3'3" (1.00m)	2'6" (0.76m)	30' (9.14m)	5680-99-563-5949
MIL9 (Green)	3'3" (1.00m)	2'6" (0.76m)	30' (9.14m)	5680-99-052-0506

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

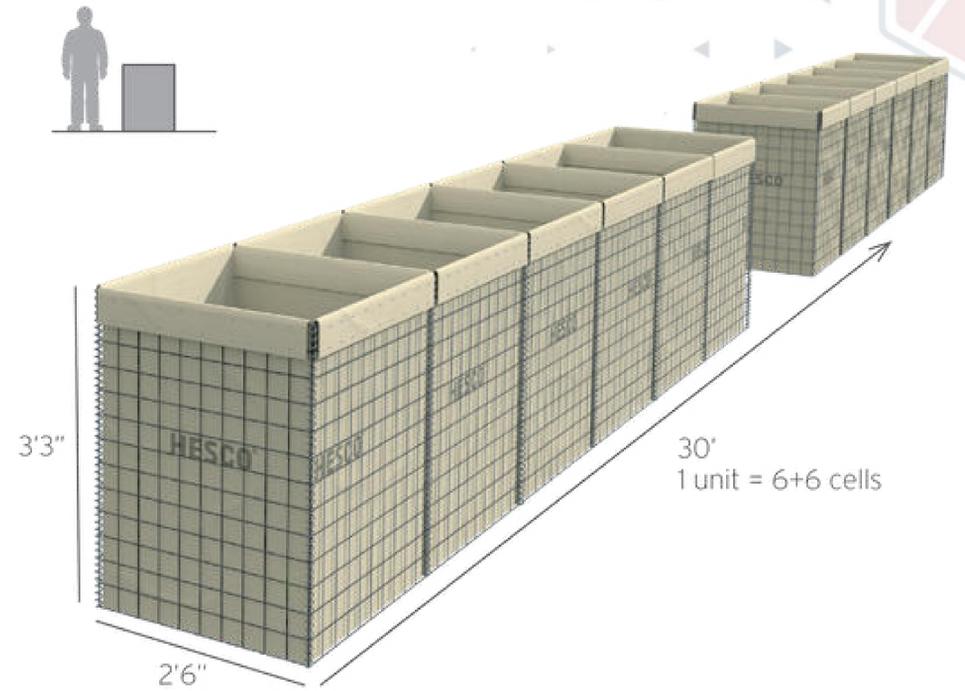

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
1'1" (0.33m)	3' (0.91m)	3'3" (1.00m)	222 lb. (101kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
7 units	6' (1.83m)	3'17" (1.09m)	3'3" (1.00m)	1,607 lb. (729kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	24	168	5,037' (1,535m)
20' Container	10	70	2,100' (640m)
40' Container	20	140	4,198' (1,280m)

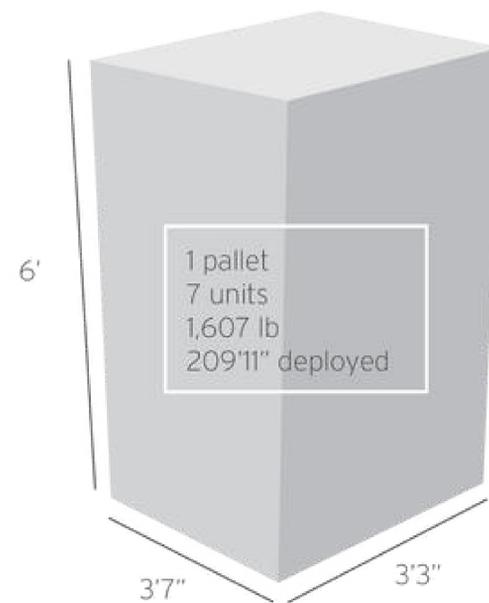

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL10 (Beige)	7'3" (2.21m)	5' (1.52m)	100' (30.5m)	5680-99-391-0852
MIL10 (Green)	7'3" (2.21m)	5' (1.52m)	100' (30.5m)	5680-99-770-0326

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

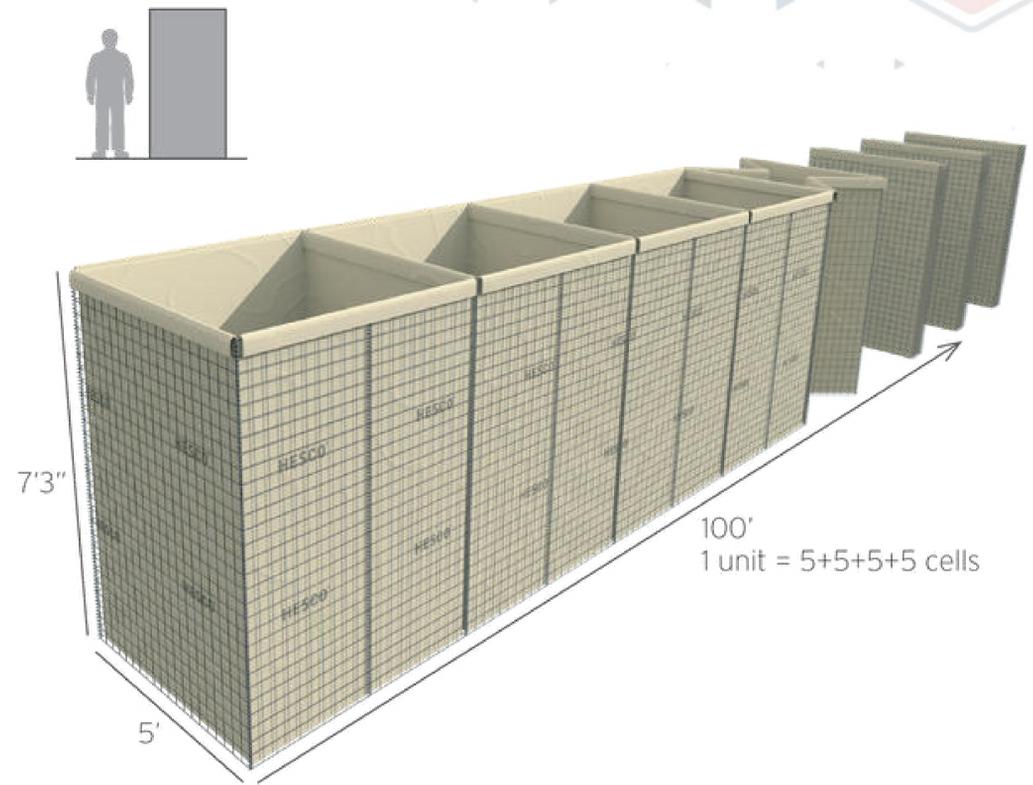

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
2'4" (0.71m)	5'5" (1.65m)	7'4" (2.24m)	2,372 lb. (1,076kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1 units	2'10" (0.87m)	5'4" (1.62m)	7'6" (2.30m)	2,496 lb. (1,132kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	20	20	2,000' (610m)
20' Container	6	6	600' (183m)
40' Container	14	14	1,400' (427m)

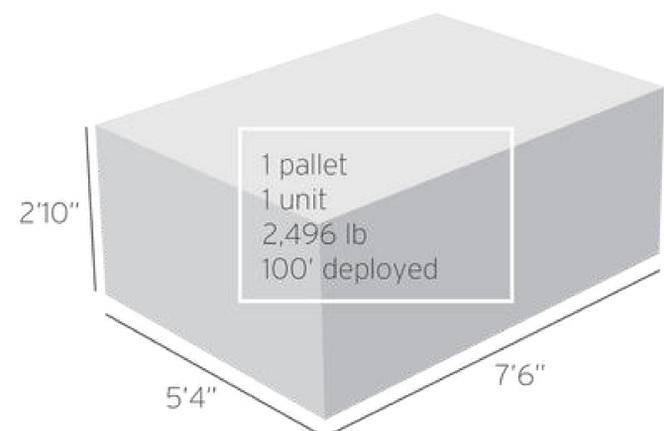

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL11 (Beige)	4' (1.22m)	12" (0.30m)	4' (1.22m)	7195-99-867-9131
MIL11 (Green)	4' (1.22m)	12" (0.30m)	4' (1.22m)	7195-99-668-0875

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

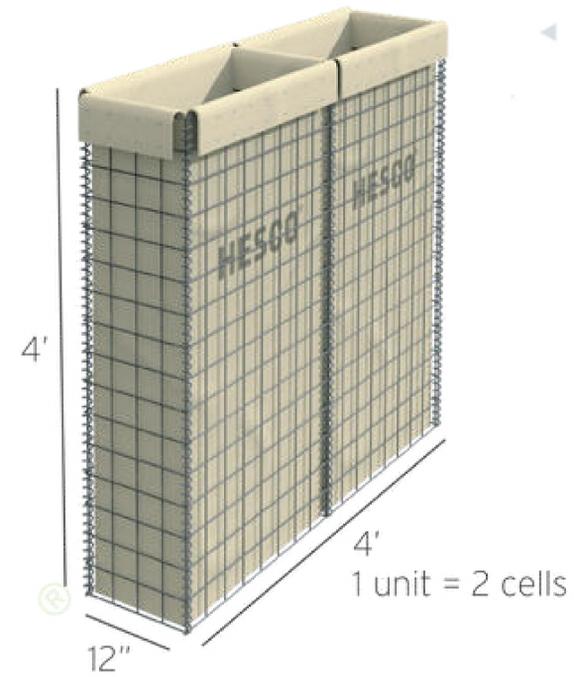

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
3" (0.08m)	2'11" (0.89m)	4' (1.22m)	35 lb. (16kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
33 units	4'3" (1.3m)	3'7" (1.1m)	3'11" (1.2m)	1,332 lb. (600kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	1080	4,322' (1,318m)
20' Container	8	480	1,921' (586m)
40' Container	16	960	3,842' (1,171m)

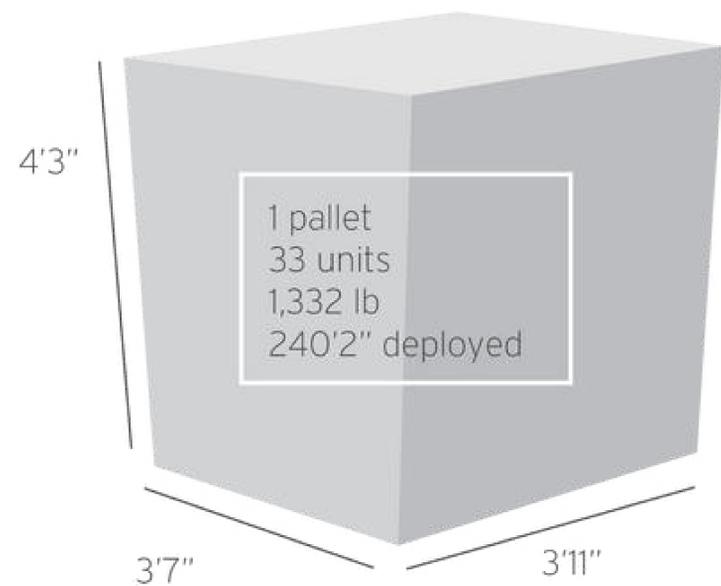

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824



TECHNICAL SPECIFICATIONS

Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL12 (Beige)	7' (2.13m)	3'6" (1.06m)	108' (33m)	5680-99-974-8891
MIL12 (Green)	7' (2.13m)	3'6" (1.06m)	108' (33m)	5680-99-153-1977

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

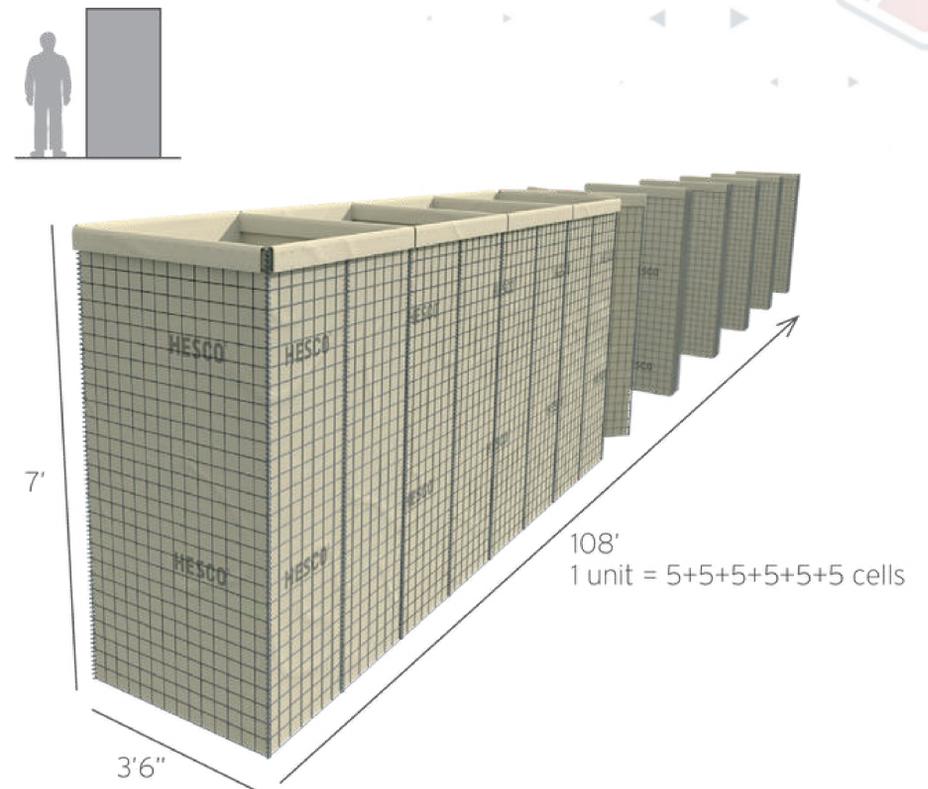

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
2'1" (0.64m)	7'8" (2.34m)	7'7" (2.32m)	1,715 lb. (778kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1 units	2'8" (0.80m)	7'8" (2.34m)	7'7" (2.32m)	1,887 lb. (856kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	18	1,948' (594m)
20' Container	6	6	650' (198m)
40' Container	15	15	1,624' (495m)

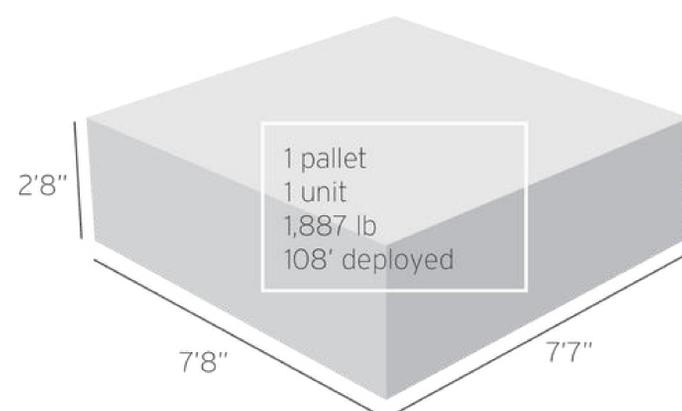

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824





TECHNICAL SPECIFICATIONS Defensive Barriers


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL19 (Beige)	9' (2.74m)	3'6" (1.06m)	10'5" (3.18m)	5670-99-152-1284
MIL19 (Green)	9' (2.74m)	3'6" (1.06m)	10'5" (3.18m)	5670-99-242-9574

A geotextile-lined unit for general use as an earth filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfils a wide range of uses, including the construction of protective wall and barriers.

GENERAL SPECIFICATION

Geotextile -lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012, Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

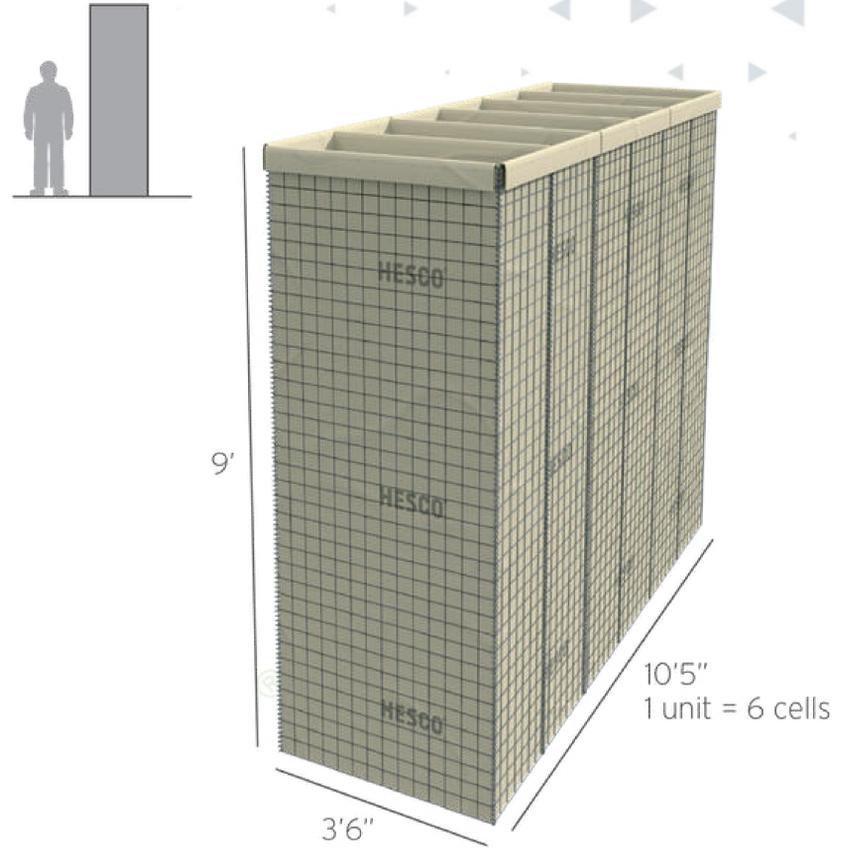

PACKAGE AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS


HEIGHT	WIDTH	LENGTH	WEIGHT
4" (0.10m)	7'3" (2.21m)	9' (2.74m)	437 lb. (198kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
6 units	2'8" (0.80m)	7'3" (2.21m)	9'2" (2.80m)	2,690 lb. (1,220kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	12	72	751" (229m)
20' Container	4	24	250'4" (76m)
40' Container	8	48	500'10" (152m)

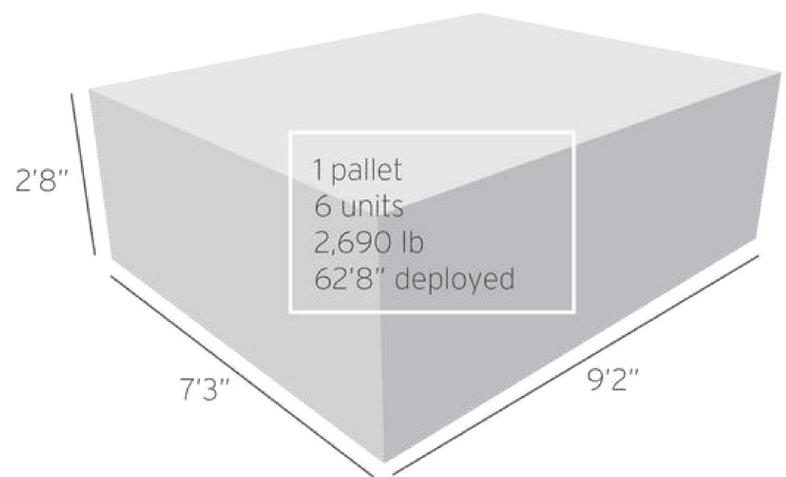

+966 11 474 8635



www.hitech.sa
sales@hitech.sa



Building no 3824, Nira Street, 2nd
Industrial area, Riyadh 14338 RSNB3824

